

# RM23608


## 2U Entry Computing and Storage Server Chassis



Rear View



Inside View

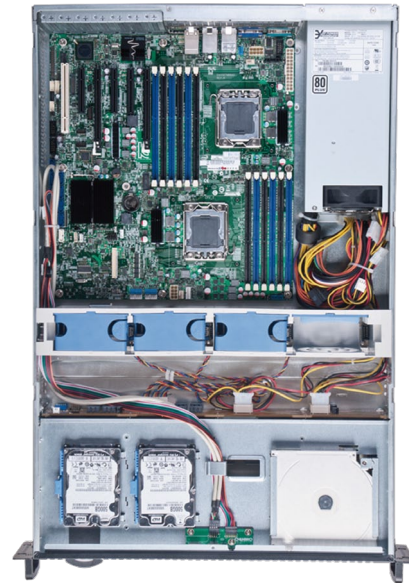

Built-in info tag



Tool-less 2.5" HDD mounting kit



Hot-swap fan module



Optional 8-port 6Gb/s mini-SAS or SATA backplane



Easy-swap 3-slot or 7-slot rear window (Option)



Air baffle to prevent air circulation

Front View



### Features & Benefits

- Optional 8-port 6Gb/s mini-SAS or SATA backplane or 12Gb/s mini-SAS backplane
- Backplanes with smart PWM fan control
- Hot-swap middle fans and air flow management
- Easy-swap slot area of rear window for 3 or 7 slots
- Front access information tag
- Internal 2x2.5" HDD bays for OS drive mirroring
- HDD carrier for 2.5" SSD or 3.5" hard disk

### Specification

<b>Model Name</b>	• RM23608
<b>M/B Form Factor</b>	• Extended ATX (12" x 13")
<b>Dimension (D x W x H)</b>	• 660x430x88(mm), 26"x16.9"x3.5"
<b>Drive Bay</b>	• RM23608: 8x 3.5" Hot-swap, 1x Slim ODD 2x 2.5" Internal HDD
<b>PSU Form Factor</b>	• 2U Single or Redundant
<b>Indicator</b>	• 1x Power Status, 1x HDD Activity • 2x LAN Activity, 1x Fan Failure & Overheat
<b>Front Control</b>	• Power On/Off, System Reset, 2x USB 2.0
<b>System Security</b>	• Intrusion Switch (Option)
<b>Cooling Fan</b>	• Middle: 4x 80mm, PWM, MAX • Rear: 2x 40mm (Option)
<b>Slot Opening</b>	• 3x Full Height & Length or 7x Low Profile
<b>HDD Backplane</b>	• 6Gb/s SATA/SAS or Mini-SAS, 12Gb/s Mini-SAS
<b>Metal Thickness</b>	• 1.2mm
<b>Net Weight</b>	• 11 kg
<b>Gross Weight</b>	• 12.7 kg
<b>Front Bezel</b>	• Option
<b>Cubic Feet</b>	• 4.98
<b>Container Info (Single Packing)</b>	• 20":314, 40":638, 40H:690

### Optional Items

	Order Code	Description
<b>Storage Kits</b>	◆ <b>Note1.</b>	Slim ODD bay to hot-swap 2.5" HDD bay
<b>Cable</b>	26H12323601A0	Mini-SAS 36 pin, SFF-8087 to SFF-8087, 600mm
	83H263215-006	Mini-SAS, internal to external, 500mm
	26H113215-030	SFF-8087 to 4x SATA Ports, 600mm
	26H12323214A0	4pcs, SATA, 560mmx2+700mmx2
<b>Bezel</b>	84H323610-009	2U plastic bezel (silfox)
<b>Backplanes</b>	80H10323604A1	8-port 6Gb/s mini-SAS backplane
	80H10323601A1	8-port 6Gb/s SATA backplane
<b>Slide Rail</b>	84H341300-002	26", For 2U/3U/4U
<b>PSU Bracket</b>	84H323610-005	P2G-6510P and YM-7501/5601
	84H323610-007	R2W-6500V and C2W Series
	84H323610-008	R21S7871A and R21S7551A Series
<b>PSU</b>	32H151002-002	510W, 2U Single, P2G-6510P, P24/P8
	32H2062000202	620W, 1+1 Redundant, C2W-5620V, PMbus V1.1
	32H2082000202	820W, 1+1 Redundant, C2W-5820V, PMbus V1.1
	32H282022-001	820W 1+1 Redundant, YH-5821, 80+
	32H2065001101	650W 1+1 Redundant, R21S7651A-G
<b>PCB</b>	84H331410-025	Chassis management, Fan/PSU/HDD Temperature
	◆ <b>Note1. SK51102</b>	

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Detailed in CHENBRO websites)

### Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM23608T2-L	12"x13"	6Gb/s SATA	3x8025	7 x LP	Option	Option
RM23608M2-L	12"x13"	6Gb/s SATA	3x8025	7 x LP	Option	Option
RM23608M3-L	12"x13"	12Gb/s SATA	3x8025	7 x LP	Option	Option