

RM14204

NEW

CHENBRO

1U 4-bay NAS Server Chassis



Features & Benefits

- Supports 6Gb/s or 12Gb/s 4-port SATA backplane
- Supports up to three internal 2.5" HDD bays
- Supports up to 3 x 40mm PWM rear fans with anti-vibration mechanism
- Supports Flex ATX PSU
- HDD carrier for 2.5" or 3.5" drive
- Tool-less installation for internal 2.5" HDD
- Front access info tag for easy server management



Up to 3 x 40mm PWM rear fans with anti-vibration mechanism



Cable manager



Built in info tag



Supports Flex ATX PSU




Up to 3 x internal 2.5" HDD bays



43.5 mm / 1.7"

430 mm / 16.9"

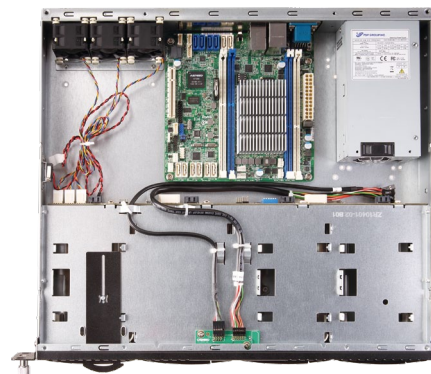

383 mm / 15"



Specification

M/B Form Factor	• Mini-ITX (6.7" x 6.7")
Dimension (D x W x H)	• 383 x 430 x 43.5 (mm), 15" x 16.9" x 1.7"
Drive Bay	• 4 x 3.5" Hot-swap HDD, Internal: 3 x 2.5"
PSU Form Factor	• Flex ATX
Indicators	• 1 x Power Status, 1 x HDD Activity, 2 x LAN Activity
Front Control	• Power On/Off, System Reset, 1 x USB2.0
Cooling Fans	• Rear: 2 x 40mm, T=28mm (Up to 3), PWM
System Security	• Intrusion Switch(Optional)
Slot Opening	• N/A
Metal Thickness	• 1.0mm
Materials	• SGCC
HDD Backplane	• 12Gb/s or 6Gb/s SATA
Net Weight	• 4.3Kg
Gross Weight	• 6.1Kg
Cubic Feet	• 2.07
Container Info.*	• 20': 400, 40': 800, 40'H: 960

*Single Packing

Optional Items

	Order Code	Description
Cable	83H263142-001	Cable, Intrusion, 600mm
Bezel	84H313710-012	Front Bezel, 1U, SilFox
Slide Rail	84H312410-001	Slide Rail, 26"
	84H311710-095	Slide Rail, 26"
	84H311610-082	Slide Rail, 26", Tool-less

※PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Detailed in CHENBRO websites)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM14204T2-250	6.7" x 6.7"	6Gb/s SATA	2 x 4028	N/A	Flex ATX 250W	Option